




# TYPICAL SECTIONS

SR 1153 RICHMOND COUNTY

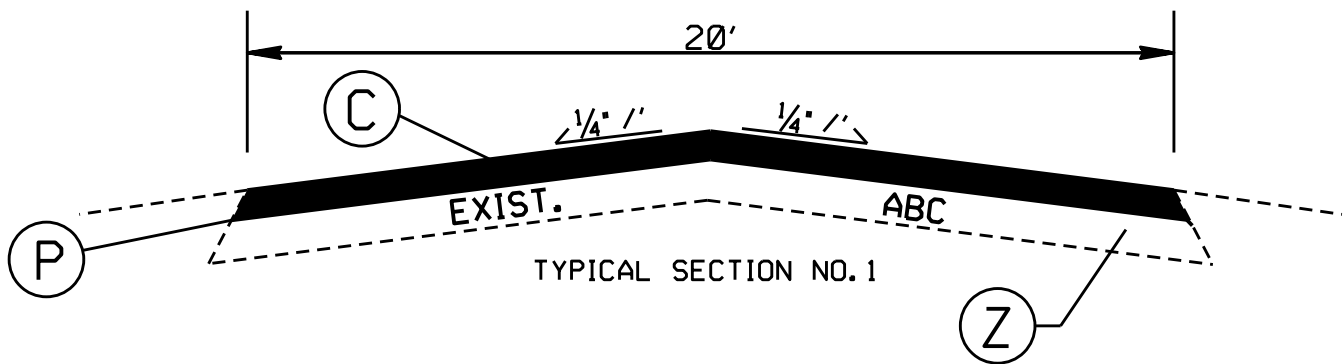

PAVEMENT SCHEDULE	
C	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
P	PRIME COAT AT THE RATE OF .20 GAL. PER SQ. YD.
Z	CONDITION EXISTING BASE

PROJECT NO.	SHEET NO.	TOTAL NO.
8C.077066	3	3

## SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	FINAL SURFACE TESTING REQUIRED	LENGTH MI	WIDTH FT	CONDITIONING EXISTING BASE MSY	PRIME COAT GAL	SURFACE COURSE, S9.5B TONS	ASPHALT BINDER FOR PLANT MIX TONS	BLOTTING SAND TON
8C.077066	Richmond	1	SR 1153	FROM END PVMT TO END	1	NO	0.47	20	6	1,167	653	39	25
<b>TOTAL FOR MAP NO. 1</b>							<b>0.47</b>		<b>6</b>	<b>1,167</b>	<b>653</b>	<b>39</b>	<b>25</b>
<b>TOTAL FOR PROJ NO. 8C.077066</b>							<b>0.47</b>		<b>6</b>	<b>1,167</b>	<b>653</b>	<b>39</b>	<b>25</b>
<b>GRAND TOTAL</b>							<b>0.47</b>		<b>6</b>	<b>1,167</b>	<b>653</b>	<b>39</b>	<b>25</b>