



METRIC STANDARD DRAWING FOR  
**SKINNY - DRUM**

METRIC STANDARD DRAWING FOR  
**SKINNY - DRUM**

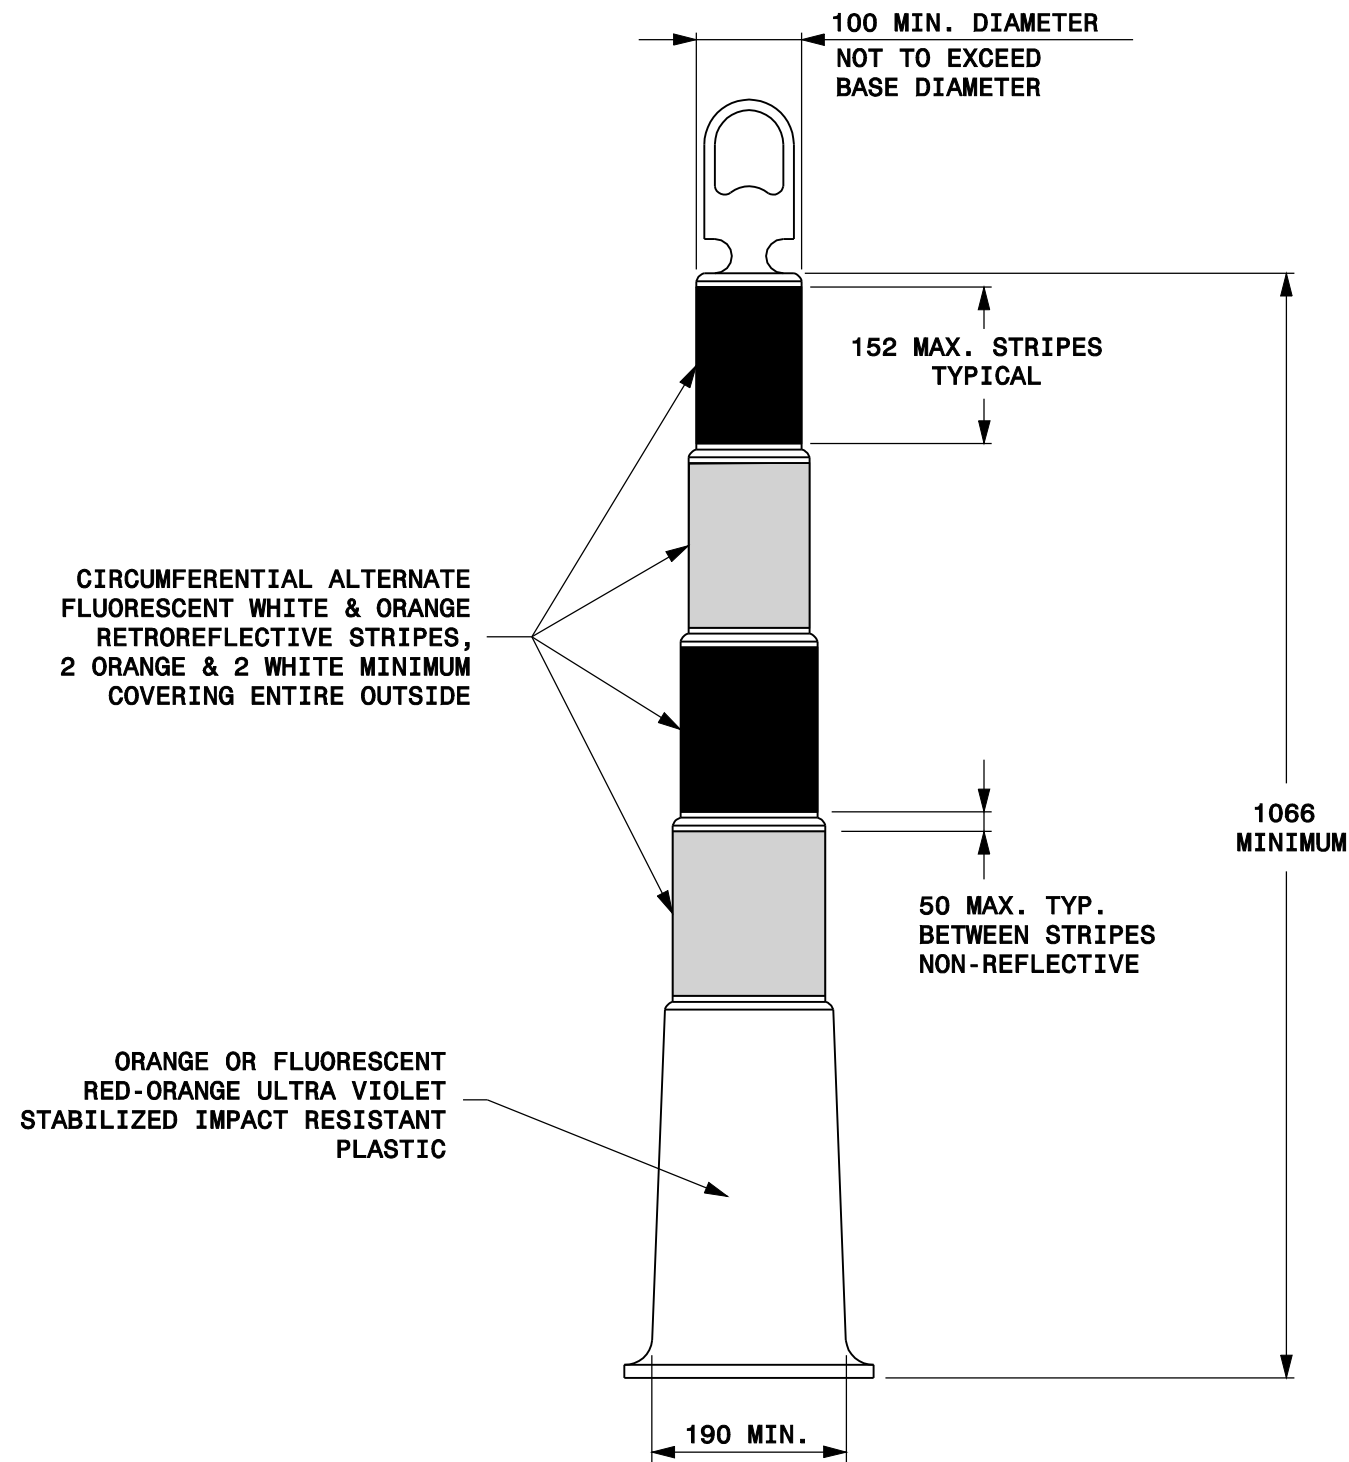

**TYPICAL BALLAST**

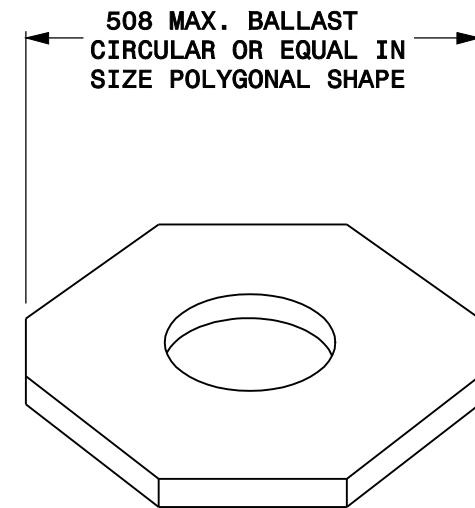

BALLAST WILL BE A MINIMUM OF 15 POUNDS

**GENERAL NOTES**

- 1-BALLASTING SHALL BE ACHIEVED BY THE PREFORMED WEIGHTED BASE OR FACTORY SAND FILLED BALLASTING METHODS. DO NOT PLACE BALLAST ON TOP OF THE DRUM. USE BALLAST AS SPECIFIED BY THE MANUFACTURER.
- 2-IF NECESSARY, PLACE THE NAME OF THE AGENCY, CONTRACTOR, OR SUPPLIER ON NON-RETROREFLECTIVE DRUM SURFACES. IF THE NAME DOES NOT FIT ON A NON-RETROREFLECTIVE SURFACE. SHOW THE LETTERS AND NUMBERS USING A NON-RETROREFLECTIVE COLOR AND NOT OVER 50mm IN HEIGHT.

**NOTE:**  
**THIS DRAWING IS DIMENSIONED IN  
MILLIMETERS UNLESS OTHERWISE  
DEPICTED WITHIN THE DRAWING.**